

FLANGES
Socket Welding
ANSI 150 LBS
ANSI 300 LBS

VALSTEEL[®]
INOX E COMPONENTES INDUSTRIAIS, LDA

2026

Imagem ilustrativa do produto.



FLANGE INOX SOCKET WELDING - ANSI 150 LBS

STAINLESS STEEL SOCKET WELDING FLANGE - ANSI 150 LBS

Qualidade/Quality:

304/304L (1.4301/1.4307)
321/321H (1.4541)
316/316L (1.4401/1.4404)
316Ti (1.4571)
904L (1.4539)
(Super)Duplex
Nickel Alloys

Normas/Norm:


FLANGE ASTM A182 - ASME B16.5 - 150 LBS
SCH 40S

Nota/Info:

Forjado I Obtained by forging

Dimensões/Availability:

Inch 1/2" - Inch 24"
outras dimensões sobre consulta
more dimensions available on demand.

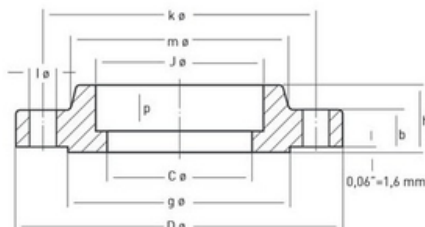

As medidas abaixo referidas estão sujeitas a confirmação pela Valsteel

DN Inch	Dimensões Flange								Furo	I	Peso kg
	D	K	J	C	p	b	h	g			
1/2"	88.9	60.5	22.4	15.8	9.7	9.7	14.2	35.1	4	15.9	0.47
3/4"	98.6	69.9	27.7	20.9	11.2	11.2	14.2	42.9	4	15.9	0.59
1"	108	79.2	34.5	26.9	12.7	12.7	15.7	50.9	4	15.9	0.87
1 1/4"	117.3	88.9	43.2	35.1	14.2	14.2	19.1	63.5	4	15.9	1.11
1 1/2"	127	98.6	49.5	40.9	15.7	15.7	20.6	73.2	4	15.9	1.45
2"	152.4	120.7	62	52.6	17.5	17.5	23.9	91.9	4	19.1	2.33
2 1/2"	177.8	139.7	74.7	62.8	19.1	20.6	26.9	104.6	4	19.1	3.55
3"	190.5	152.4	90.7	77.9	20.6	22.4	28.4	127	4	19.1	4.19
4"	228.6	190.5	116.1	102.3	-	22.4	31.8	157.2	8	19.1	3.02
5"	254	215.9	143.8	128.1	-	22.4	35.1	185.7	8	22.2	-
6"	279.4	241.3	170.7	154.2	-	23.9	38.1	215.9	8	22.2	3.97
8"	342.9	298.5	221.5	202.8	-	26.9	42.9	269.7	8	22.2	-
10"	406.4	362	276.4	254.5	-	28.4	47.7	323.9	12	25.4	-
12"	482.6	431.8	327.2	304.8	-	30.2	53.8	381	12	25.4	-
14"	533.4	476.3	359.2	336.6	-	33.3	55.6	412.8	12	28.6	-
16"	596.9	539.8	410.5	387.4	-	35.1	62	469.9	16	28.6	-
18"	635	577.9	461.8	438.2	-	38.1	66.5	533.4	16	31.8	-
20"	698.5	635	513.1	489	-	41.1	71.4	584.2	20	31.8	-
24"	812.8	749.3	616	590.6	-	46	81	692.2	20	34.9	-



Visite nosso site para obter
uma visão geral completa:

Valsteel.pt



Morada:

Sede e armazém

Rua das Lages 544/552

4410-312 Canelas - Vila Nova de Gaia - PORTUGAL



+ 351 227 320 510



comercial@valsteel.pt

FLANGE INOX SOCKET WELDING - ANSI 150 LBS



FLANGE INOX SOCKET WELDING - ANSI 300 LBS

STAINLESS STEEL SOCKET WELDING FLANGE - ANSI 150 LBS

Qualidade/Quality:

304/304L (1.4301/1.4307)

321/321H (1.4541)

316/316L (1.4401/1.4404)

316Ti (1.4571)

904L (1.4539)

(Super)Duplex

Nickel Alloys

Normas/Norm:

FLANGE ASTM A182 - ASME B16.5 - 300 LBS

SCH 40S

Nota/Info:


Forjado I Obtained by forging

Dimensões/Availability:

Inch 1/2" - Inch 24"

outras dimensões sobre consulta

more dimensions available on demand.

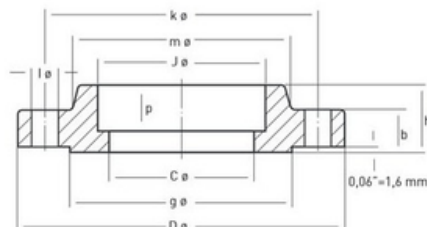

As medidas abaixo referidas estão sujeitas a confirmação pela Valsteel

DN Inch	Dimensões Flange								Furo	I	Peso kg
	D	K	J	C	p	b	h	g			
1/2"	95,3	66,5	22,4	15,8	9,7	12,7	20,6	35,1	4	15,9	0,62
3/4"	117,3	82,6	27,7	20,9	11,2	14,2	23,9	42,9	4	19,1	1,19
1"	124	88,9	34,5	26,6	12,7	15,7	25,4	50,8	4	19,1	1,44
1 1/4"	133,4	98,6	43,2	35,1	14,2	17,5	25,4	63,5	4	19,1	1,73
1 1/2"	155,4	114,3	49,5	40,9	15,7	19,1	28,7	73,2	4	22,2	2,62
2"	165,1	127	62	52,6	17,5	20,6	31,8	91,9	8	19,1	2,94
2 1/2"	190,5	149,4	74,7	62,8	19,1	23,9	36,6	104,6	8	22,2	5,63
3"	209,6	168,1	90,7	77,9	20,6	26,9	41,4	127	8	22,2	6,2
4"	254	200,2	116,1	102,3	-	30,2	46,2	157,2	8	22,2	5,23
5"	279,4	235	143,8	128,1	-	33,3	49,3	185,7	8	22,2	-
6"	317,5	269,7	170,7	154,2	-	35,1	50,8	215,9	12	22,2	-
8"	381	330,2	221,5	202,8	-	39,6	60,5	269,7	12	25,4	-
10"	444,5	387,4	276,4	254,5	-	46	65	323,9	16	28,6	-
12"	520,7	450,9	327,2	304,8	-	49,3	71,6	381	16	31,8	-
14"	584,2	514,4	359,2	336,6	-	52,3	74,7	412,8	20	31,8	-
16"	647,7	571,5	410,5	387,4	-	55,6	81	469,9	20	34,9	-
18"	711,2	628,7	461,8	438,2	-	58,7	87,4	533,4	24	34,9	-
20"	774,7	685,8	513,1	489	-	62	93,7	584,2	24	34,9	-
24"	914,4	812,8	616	590,6	-	68,3	104,9	692,2	24	41,3	-

Visite nosso site para obter
uma visão geral completa:**Valsteel.pt****Morada:**

Sede e armazém

Rua das Lages 544/552

4410-312 Canelas - Vila Nova de Gaia - PORTUGAL

☎ + 351 227 320 510

✉ comercial@valsteel.pt

FLANGE INOX SOCKET WELDING - ANSI 300 LBS